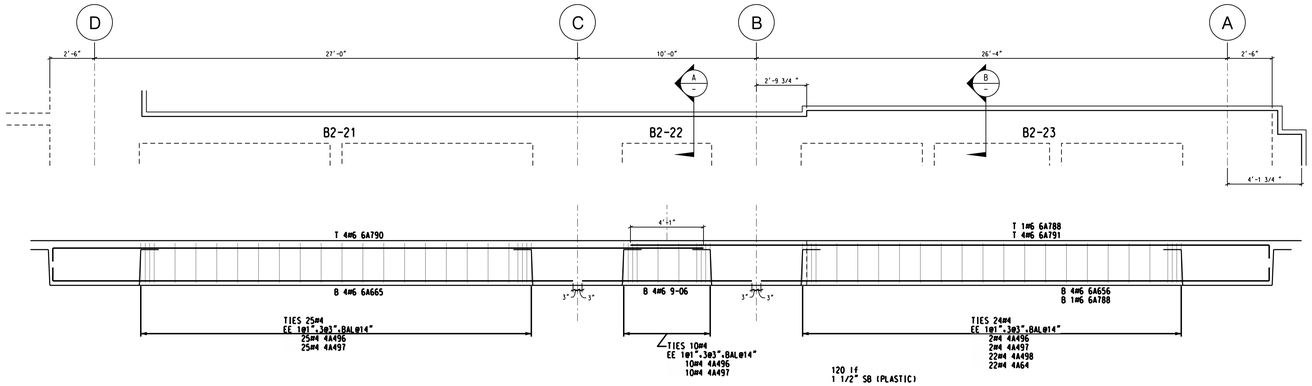

120 lf
1 1/2" SB (PLASTIC)

ELEVATION 10
1/4"-1'-0" POUR 3 NORTH

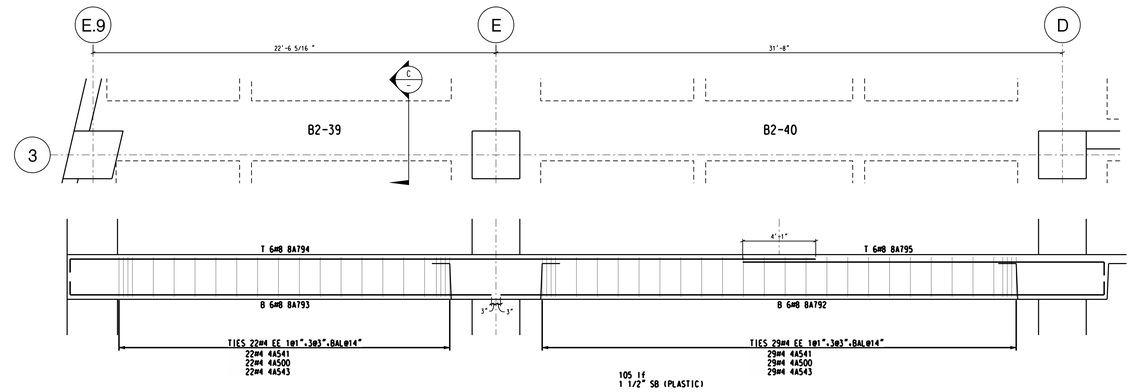

105 lf
1 1/2" SB (PLASTIC)

ELEVATION 11
1/4"-1'-0" POUR 3 SOUTH

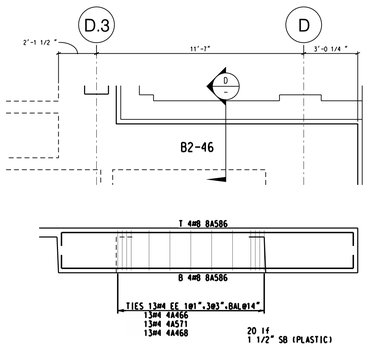

20 lf
1 1/2" SB (PLASTIC)

ELEVATION 12
1/4"-1'-0" POUR 3 SOUTH

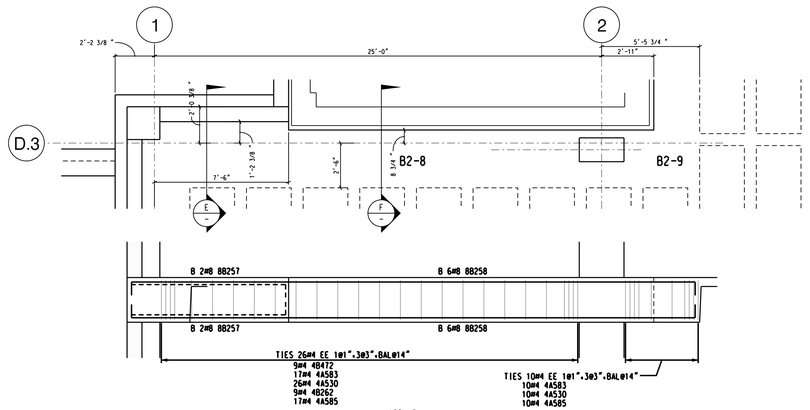

100 lf
1 1/2" SB (PLASTIC)

ELEVATION 13
1/4"-1'-0" POUR 3 SOUTH

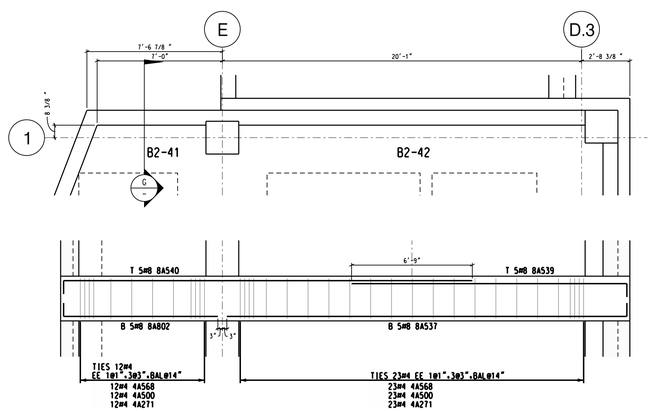

60 lf
1 1/2" SB (PLASTIC)

ELEVATION 14
1/4"-1'-0" POUR 3 SOUTH

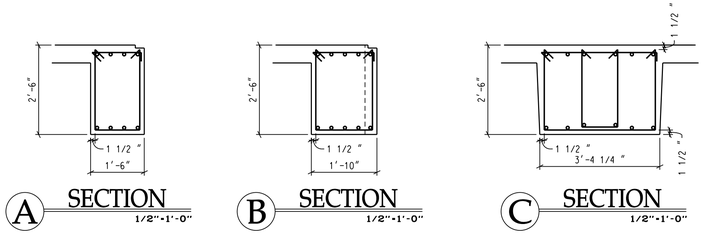

	SIZE	EP	BAR MARK	V	BND TYP	CD	A	B	C	D	E	F/R	G	H	J	K	O
2	8		8A537		2		1-04	22-06									
S3	8		8A539		2		1-04	15-06									
19	8		8A540		2		1-04	23-06									
	8		8A586		2		1-04	16-03					1-04				
	8		8A792		2		1-04	33-09									
	8		8A793		2		1-04	23-09									
	8		8A794		2		1-04	41-09									
	8		8A795		2		1-04	20-04									
	8		8A802		2		1-04	9-00									
	8		8B257		2		1-04	8-07					1-04				
	8		8B258		2		1-04	31-06					1-04				
	6		6A656		2		1-00	28-05									
	6		6A665		2		1-00	29-01									
	6		6A788		2		1-00	25-07					1-00				
	6		6A790		2		1-00	36-06									
	6		6A791		2		1-00	35-09									
	4		4A64		T9		0-042	1-07					0-042				
	4		4A271		T9		0-042	2-05					0-042				
	4		4A466		S3		0-042	2-03	2-03	2-03			0-042				
	4		4A468		T9		0-042	2-03					0-042				
	4		4A496		S3		0-042	2-03	1-03	2-03			0-042				
	4		4A497		T9		0-042	1-03					0-042				
	4		4A498		S3		0-042	2-03	1-07	2-03			0-042				
	4		4A500		S3		0-042	2-03	1-00	2-03			0-042				
	4		4A530		S3		0-042	2-03	0-09	2-03			0-042				
	4		4A541		S3		0-042	2-03	3-011	2-03			0-042				
	4		4A543		T9		0-042	3-011					0-042				
	4		4A568		S3		0-042	2-03	2-05	2-03			0-042				
	4		4A571		S3		0-042	2-03	0-11	2-03			0-042				
	4		4A583		S3		0-042	2-03	2-113	2-03			0-042				
	4		4A585		T9		0-042	2-113					0-042				
	4		4B262		T9		0-042	4-031					0-042				
	4		4B472		S3		0-042	2-03	4-031	2-03			0-042				

NOTES
1) BAR CLEARANCE (MIN):
   3"- BOTTOM OF FTGS, GRADE BEAMS AND SOG.
   2"- TOP AND SIDES OF FTGS & GRADE BEAMS.
   2"- ALL SIDES OF WALLS.
   1 1/2"- BEAMS.
   3/4"- INTERIOR SLABS NOT EXPOSED.
2) BAR LAPS:
   AS NOTED ON PLAN AND SECTIONS.

Revisions		
Description	Date	No.
Sent For Approval	-	0
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

BAR SIZES: IMPERIAL #3 #4 #5 #6 #7 #8 #9 #10 #11 #14 #18 / METRIC #10 #13 #16 #19 #22 #25 #29 #32 #36 #43 #57

ABBREVIATIONS: IF INSIDE FACE; OF OUTSIDE FACE; NF NEAR FACE; FF FAR FACE; EF EACH FACE; EW EACH WAY; V VERTICAL; H HORIZONTAL; DWL DOWEL; B BOTTOM; T TOP; BIF BEND IN FIELD; SW SHORT WAY; LW LONG WAY; PBO PLACED BY OTHERS; NIC NOT IN CONTRACT; D&G DRILL & GROUT; ALT ALTERNATE

CRSI MEMBER

Date Approved:
Date Made:
Contact:
Made By:

Job: WHITACRE JOB #22179
Location: Syracuse, NY
Contractor: -
Architect: -

The Whitacre Engineering Company
CANTON, OHIO (330) 588-2170 SYRACUSE, NY (315) 622-1075

REINFORCING STEEL PLACING DRAWING ONLY. USE IN CONJUNCTION WITH CONTRACT DRAWINGS & SPECIFICATIONS. ELEVATIONS & DIMENSIONS SHOWN ON THIS DRAWING ARE FOR DETAILING PURPOSES ONLY & SHOULD NOT BE USED FOR CONSTRUCTION UNLESS VERIFIED BY THE ENGINEER OR THE CONTRACTOR.
ALL EXCAVATIONS AND TRENCHES THAT ARE 5'-0" OR DEEPER MUST FULLY COMPLY WITH OSHA STANDARDS BEFORE EMPLOYEES OF WHITACRE OR ITS SUBCONTRACTORS ENTER ANY EXCAVATED AREA.

Reinforcing (ASTM A615 Grade 60)

Title: 2nd Floor Beam Elevations 10-14

Releases: -
Contract: 22179
Sheet: 4105